


# CABLEMOUNT MOUNT SERIES: CM02508

## Dimensions & Load Ratings

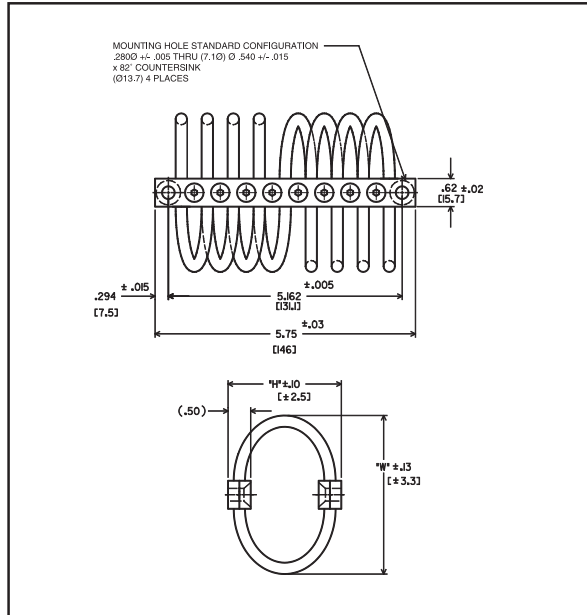

SUFFIX	MOUNTING HOLE CONFIGURATION
NONE	Standard Configuration as shown in drawing
- A	1/4 -28 Threaded inserts in both retaining bars
- B	1/4 -28 Threaded inserts in one retaining bar and standard configuration as shown in drawing in other retaining bar
- C	M6 x 1.0 Threaded inserts in both retaining bars
- D	M6 x 1.0 Threaded inserts in one retaining bar and standard configuration as shown in drawing in other retaining bar w/90° countersink
- E	Standard configuration as shown in drawing w/ 90° countersink

PART #	DIMENSIONS		COMPRESSION		SHEAR		ROLL		45° COMP/ROLL	
	H	W	Load Rating	Max. Deflection	Load Rating	Max. Deflection	Load Rating	Max. Deflection	Load Rating	Max. Deflection
CM02508-1	1.90	2.20	163	.6	69	.8	62	.8	90	1.5
CM02508-2	2.13	2.50	113	.8	45	1.0	40	1.0	65	1.8
CM02508-3	2.31	2.80	94	1.0	30	1.3	33	1.3	50	2.2
CM02508-4	2.50	3.13	63	1.1	20	1.6	23	1.6	38	2.3
CM02508-5	2.50	3.50	50	1.3	15	1.7	21	1.7	30	2.5
CM02508-6	2.63	3.75	43	1.5	13	1.9	20	1.9	24	2.7
CM02508-7	2.63	3.95	38	1.5	12	2.0	13	2.0	26	2.8
CM02508-8	3.25	4.25	29	2.0	9	2.2	12	2.2	18	3.0

Natural Frequency at rated load = approx. 10 Hertz