


# CABLEMOUNT MOUNT SERIES: CM03758

## Dimensions & Load Ratings

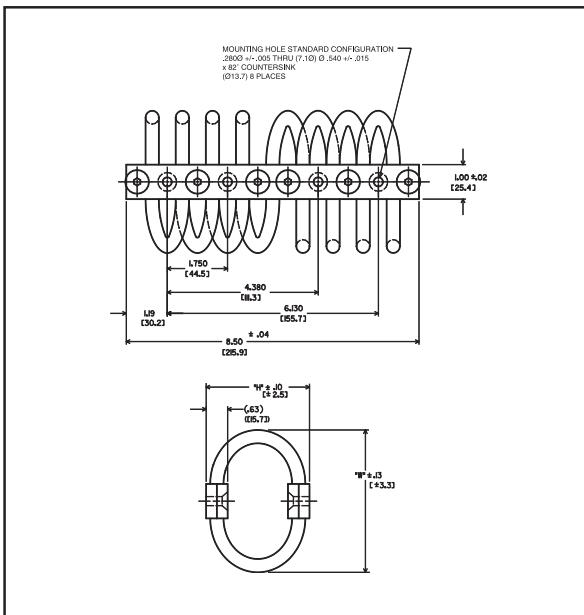

SUFFIX	MOUNTING HOLE CONFIGURATION
NONE	Standard Configuration as shown in drawing
- A	1/4 -28 Threaded inserts in both retaining bars
- B	1/4 - 28 Threaded inserts in one retaining bar and standard configuration as shown in drawing in other retaining bar
- C	M 6 x 1.0 Threaded inserts in both retaining bars
- D	M 6 x 1.0 Threaded inserts in one retaining bar and standard configuration as shown in drawing in other retaining bar w/90° countersink
- E	Standard configuration as shown in drawing w/ 90° countersink

PART #	DIMENSIONS		COMPRESSION		SHEAR		ROLL		45° COMP/ROLL	
	H	W	Load Rating	Max. Deflection	Load Rating	Max. Deflection	Load Rating	Max. Deflection	Load Rating	Max. Deflection
CM03758-1	2.80	3.31	350	1.0	150	1.0	106	1.0	260	1.5
CM03758-2	2.90	3.50	325	1.1	63	1.1	88	1.1	240	2.0
CM03758-3	3.00	4.13	200	1.3	60	1.5	69	1.5	135	2.3
CM03758-4	3.25	4.25	175	1.5	38	1.6	59	1.6	120	2.8
CM03758-5	3.50	4.50	138	1.8	34	1.7	30	1.7	75	3.5
CM03758-6	4.13	4.75	125	2.0	31	2.0	28	2.0	70	4.0
CM03758-7	4.25	5.50	75	2.2	19	2.2	22	2.2	40	4.5

Natural Frequency at rated load = approx. 10 Hertz